
P15 style feeders The most versatile ever built



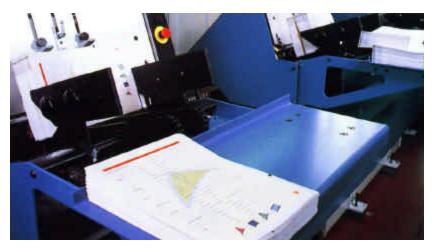

The operator has an open view and access to all mechanisms on the signature flow path, so set-up is quick, easy and tool-less.

Maximum signature size 483X321 mm (19"X 12-5/8") Minimum signature size 90 X 95 mm (3-1/2" X 3-3/4")

The Pacesetter SP705's P15 vertical feeding hoppers are the most versatile available in terms of the signature types they can effectively handle. High or low folio signatures are opened with grippers, no lap signatures by vacuum. The P15 feeder can feed no lap signatures of the same maximum size as signatures with a lap unlike competitive systems. Furthermore, grippers and vacuum can be used together if required. In short, tabloid and landscape (oblong) signatures, double parallels and traditionally tricky formats can all be fed with ease.

Each individual feeder can be run at full or half speed, or disengaged when not in use to prevent unnecessary wear.

Feeder base frames will accommodate 2 or 4 feeders, the maximum base length being 16 spaces. Feeders can be quickly and easily moved to different positions on the base frame.

Accurate signature control throughout feeding is assured by utilizing saddle swords to give optimum register on the chain. Movable air curtain sections are available for empty hopper spaces to maintain control.

Vacuum pumps and blowers are located at the chain return end of the inserter.